

CERTIFIED COPY OF

Application Based on GB 0226309.3, filed November 12, 2002

Docket **85383F-P**

Inventors: Julie Baker

Customer No. 01333

**METHOD OF MAKING A MATERIAL**

Commissioner for Patents,  
ATTN: MAIL STOP PATENT APPLICATION  
P.O. Box 1450  
Alexandria, VA. 22313-1450

Express Mail Label No.: EV 293 509 978 US

Date: October 16, 2003





INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed   
Dated 15 April 2003



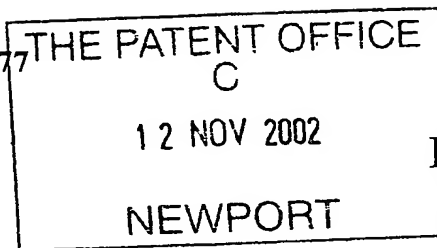

The  
Patent  
Office

12NOV02 E76272-1 000113  
P01/7700 0.00-0226309.3

1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference	85383/12783/03		
2. Patent application number (The Patent office will fill in this part)	0226309.3		12 NOV 2002
3. Full name, address and postcode of the or of each applicant (underline all surnames)	EASTMAN KODAK COMPANY 343 STATE STREET ROCHESTER NEW YORK 14650-2201 UNITED STATES OF AMERICA		
Patents ADP number (if you know it)	423 02 0001		
If the applicant is a corporate body, give the country/state of its incorporation	NEW JERSEY		
4. Title of the invention	METHOD OF MAKING A MATERIAL		
5. Name of your agent (if you have one)	B BARKER		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) 798 902 3002	KODAK LIMITED PATENTS, W92-3A HEADSTONE DRIVE HARROW MIDDLESEX HA1 4TY		
Patents ADP number (if you know it)			
6. If you are declaring priority from one or more earlier patent applications, give the country and date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of Filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description 7

Claim(s) 1

Abstract 1

Drawing(s) 1 +1 RM

- 
10. If you are also filing any of the following, state how many against each item.

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patent Form 9/77*)

Request for substantive examination (*Patent Form 10/77*)

Any other documents  
(please specify)

- 
11. I/We request the grant of a patent on the basis of this application.

Signature *B Barker*

Date 11/11/02

- 
12. Name and daytime telephone number of person to contact in the United Kingdom **B BARKER** **020 8424 5177**

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

## **Method of Making a Material**

### **Field of the Invention**

This invention relates to a method of making a material, in particular to a  
5 method of making a foamed polymeric material suitable for use as an inkjet  
printing medium.

### **Background of the Invention**

Inkjet printing is a process in which a stream of ink, preferably in the form  
10 of droplets, is ejected at high speed from nozzles against a medium so as to create  
an image.

Media used for inkjet recording need to be dimensionally stable,  
absorptive of ink, capable of providing a fixed image and compatible with the  
imaging materials and hardware.

15 Most commercial photo quality inkjet media can be classified in one of  
two categories according to whether the principle component material forms a  
layer that is porous or non porous in nature. Inkjet media having a porous layer  
are typically formed of inorganic materials with a polymeric binder. When ink is  
applied to the medium it is absorbed into the porous layer by capillary action. The  
20 ink is absorbed very quickly but the open nature of the porous layer can contribute  
to the instability of printed images, particularly when the images are exposed to  
environmental gases such as ozone.

Inkjet media which have a non porous layer are typically formed of one or  
more polymeric layers that swell and absorb the applied ink. Due to the  
25 limitations of the swelling mechanism this type of media is slow to absorb the ink.  
However, once dry the printed images are often stable when subjected to light and  
ozone.

Alternatives to pure "porous" or "non porous" media are hybrids which  
take the merits of each pure medium. These hybrids have swellable porous layers.  
30 One such media is created from foamed polymer layers using a swellable  
hydrophilic polymer and blowing agents. This results in the formation of voids in  
the polymer layer which lead to improved absorption of the ink. Instead of the ink

being held in pores which are located in-between particles, as in conventional porous media, the ink is located within the polymer. This results in improved image stability.

UK patent application GB 0218505.6 discloses an inkjet printing medium  
5 formed by a foamed polymeric layer. This medium may be created by the use of blowing agents.

### **Problem to be solved by the Invention**

It has been found that when blowing agents are added to the coating  
10 solutions prior to coating the surface of the final foamed polymeric inkjet media is quite rough. This is due to gas bubbles present in the melt, and therefore in the coating, acting as nucleation sites for further bubbles to form around. Coating quality can also be poor due to the pre-formed gas bubbles passing down the hopper slide. These gas bubbles cause lines, streaks and edge retraction.

15 It is an aim of the invention to provide a method of improving the surface characteristics and/or coating quality of a foamed polymeric material.

### **Summary of the Invention**

According to the present invention there is provided a method of making a  
20 material comprising the steps of coating a support with a solution comprising a polymer and at least one blowing agent, activation of the blowing agent being prevented until after coating.

The invention further provides a material formed by the method described above, in particular an inkjet printing/recording medium.

25

### **Advantageous Effect of the Invention**

The present invention provides a method of making an inkjet media having a porous hydrophilic polymer layer with improved surface characteristics.

Significantly smoother surfaces can be achieved with the method of the invention.

30

The method also produces better quality coating. As the blowing agents are prevented from being activated prior to the coating process there are no pre-formed bubbles passing down the hopper. As described earlier these pre-formed



bubbles cause lines, streaks and edge retraction so the coating quality is improved using the method of the invention.

### **Brief Description of the Drawings**

5           The invention will now be described, by way of example, with reference to the accompanying drawings, in which:

          Figure 1 is a scanning electron micrograph of a section through an inkjet receiver showing the bubble formation in an ink receiving layer formed with coating A as described below; and

10           Figure 2 is a scanning electron micrograph of a section through an inkjet receiver showing the bubble formation in an ink receiving layer formed with coating B as described below.

### **Detailed Description of the Invention**

15           The present invention provides a method of making a material. The material may have many different uses, including use as an inkjet medium.

          The medium comprises a support layer, such as resin coated paper, PET film base, acetate, printing plate or any other suitable support, and a polymeric layer supported on the support layer.

20           The polymeric layer comprises a hydrophylic polymer. Examples could include polyvinyl alcohol, polyethylene oxide, polyvinyl pyrrolidone and gelatin

          The polymeric layer is created by the use of blowing agents. Examples of suitable blowing agents include a mixture of sodium nitrite and ammonium chloride, metal carbonates and bicarbonates. Further examples of suitable  
25   blowing agents are described in, for example, the Handbook of Polymeric Foams and Foam Technology, edited by Daniel Klempner and Kurt C. Frisch, Chapter 17: Blowing Agents for Polymer Foams, Section 3 Chemical Blowing Agents (chapter written by Dr. Fyodor A. Shutov). Heat causes the blowing agents to decompose and create gas bubbles within the solution which causes foaming of  
30   the polymer. The foam is effectively a network of either open or closed cell arrangements of voids within a polymer matrix. Full details of such an inkjet medium are disclosed in UK patent application GB 0218505.6.

If the blowing agents are added to the coating solution prior to coating it is possible that gas bubbles can form prior to coating. Whether or not bubbles are formed depends on the temperature required for initiation of the decomposition of the blowing agent or agents and the pH of the solution. When gas bubbles are present in the melt and therefore in the coating solution it has been found that they can act as nucleation sites for other bubbles to form around when the blowing agents decompose vigorously in the drying section of the coating track. This results in quite rough surfaces on the inkjet receiver. Coating quality can also be affected when the pre-formed bubbles pass down the hopper, causing lines, streaks and edge retraction.

It has been found that if the blowing agents are dual melted into one of the layers at the hopper there is not enough time or heat available for the blowing agents to begin to decompose before the coating process begins. Therefore no bubbles are pre-formed, the bubbles not beginning to form until the coating solution containing the blowing agents passes into the dryers where the heat can initiate the gas formation. As there are no pre-formed bubbles to act as nucleation sites for new bubbles to form around significantly smoother surfaces can be achieved on the inkjet medium. The coating quality is also improved due to there being no pre-formed bubbles in the melts.

If two or more components are required for initiation of decomposition of the blowing agents the prevention of any pre-formed bubbles can also be achieved by adding one of the components to the melts prior to coating and dual melting the other one or more at the hopper. This method prevents the components being able to react until they all come together in the hopper. A further method of achieving prevention of initiation of decomposition is to add each component required to a separate layer of the coating. Once again, this method prevents the components being able to react until all the layers are coated together.

It has been shown that improved surface quality and coating quality can be achieved by preventing the initiation of the decomposition of the blowing agents prior to coating.

The following example demonstrates the invention.

Example

A resin-coated paper support was coated on the front with three ink-receiving layers. Each layer comprised polyvinyl alcohol (PVA), blowing agents (a total of 50% by weight compared to the PVA laydown) and some surfactant.

5        Coating A was a control coating in which the blowing agents were added directly to the melts prior to coating.

In coating A the ink-receiving layer nearest the support consisted of 5.7 g/m<sup>2</sup> of PVA, 1.61 g/m<sup>2</sup> of sodium nitrite, 1.24 g/m<sup>2</sup> of ammonium chloride and 0.106 g/m<sup>2</sup> of surfactant. The middle ink-receiving layer consisted of 6.2 g/m<sup>2</sup> of  
10 PVA, 1.75 g/m<sup>2</sup> of sodium nitrite, 1.35 g/m<sup>2</sup> of ammonium chloride and 0.212 g/m<sup>2</sup> of surfactant. The top ink-receiving layer consisted of 7.1 g/m<sup>2</sup> of PVA, 2.00 g/m<sup>2</sup> of sodium nitrite, 1.55 g/m<sup>2</sup> of ammonium chloride and 0.318 g/m<sup>2</sup> of surfactant. Therefore the total PVA laydown of the entire coating pack was 19.0 g/m<sup>2</sup> and the total laydown of the blowing agents was 9.5 g/m<sup>2</sup>. The three layers  
15 were then coated simultaneously on a bead-coating machine using a standard slide hopper.

Coating B was a coating where the blowing agents were dual melted into the top ink receiving layer at the hopper.

In coating B the ink-receiving layer nearest the support consisted of 6.4 g/m<sup>2</sup> of PVA and 0.106 g/m<sup>2</sup> of surfactant. The middle ink-receiving layer  
20 consisted of 7.2 g/m<sup>2</sup> of PVA and 0.212 g/m<sup>2</sup> of surfactant. The top ink-receiving layer consisted of 5.4 g/m<sup>2</sup> of PVA and 0.318 g/m<sup>2</sup> of surfactant. The blowing agents were then dual melted into the top ink receiving layer. The 40% sodium nitrite solution was dual melted using a laydown of 13.4 mls/m<sup>2</sup> (which is  
25 equivalent to 5.35 g/m<sup>2</sup> of sodium nitrite). The 20% ammonium chloride solution was dual melted using a laydown of 20.8 mls/m<sup>2</sup> (which is equivalent to 4.15 g/m<sup>2</sup> of ammonium chloride). Therefore the total PVA laydown of the entire coating pack was 19.0 g/m<sup>2</sup> and the total laydown of the blowing agents was 9.5 g/m<sup>2</sup> i.e. the same as for coating A. The three layers were then coated simultaneously on a  
30 bead-coating machine using a standard slide hopper

To initiate the blowing process, the dryers inside the coating track were set to 90 °C through which the coating according to the present invention, coating B, and the control coating, coating A, were passed.

Figures 1 and 2 show scanning electron micrographs for coating A and coating B respectively. The figures indicate that bubble formation is unaffected by the method of addition of the blowing agents. This is important since the ink retention of the surface is therefore unaffected.

Table 1 shows the surface roughness measurement from both coating A and coating B. The table shows how the method of addition of the blowing agent effects the surface roughness of the resulting ink receiving layer.

**Table 1**

Coating	Blowing Agent Addition Method	Rt (μm)	Rz (μm)	Rpm (μm)
A	Added to pots	34.259	33.196	25.919
B	Dual Melted	25.816	22.423	12.666

Rt = Maximum value from peak to valley

Rz = Average peak to valley height

Rpm = Average height

From the data in Table 1, it can be seen that significantly smoother surfaces are achieved when the blowing agents are dual melted (coating B) into one of the ink receiving layers at the hopper (indicated by lower roughness figures), compared to adding the blowing agents to the PVA melts prior to coating (coating A).

It can thus be seen that the method of addition of the blowing agents can affect the surface characteristics and coating quality of a foamed polymeric inkjet receiver. Both improved surface quality and coating quality can be achieved by preventing the activation of the blowing agent(s) until after coating has taken place.

It will be understood by those skilled in the art that the invention is not limited to use with bead coating. Any conventional coating method may be used.

The invention has been described in detail with reference to preferred embodiments thereof. It will be understood by those skilled in the art that variations and modifications can be effected within the scope of the invention.

**Claims:**

1. A method of making a material comprising the steps of coating a support with a solution comprising a polymer and at least one blowing agent, activation of the blowing agent being prevented until after coating.

5

2. A method as claimed in claim 1 wherein the blowing agent is dual melted into a layer of solution prior to coating.

3. A method as claimed in claim 1 wherein the components of the blowing agent are added to separate layers of solution.

10

4. A method as claimed in claim 1 wherein one component of the blowing agent is dual melted into a layer of solution prior to coating and one component is added to a melt prior to coating.

15

5. A material formed by a method as claimed in any previous claim.

6. An inkjet recording medium formed by a method as claimed in any of claims 1 to 4.

### Abstract

#### Method of Making a Material

A method of making a material comprises the steps of coating a support with a solution, the solution comprising a polymer and at least one blowing agent.

- 5 Activation of the blowing agent is prevented until after coating.





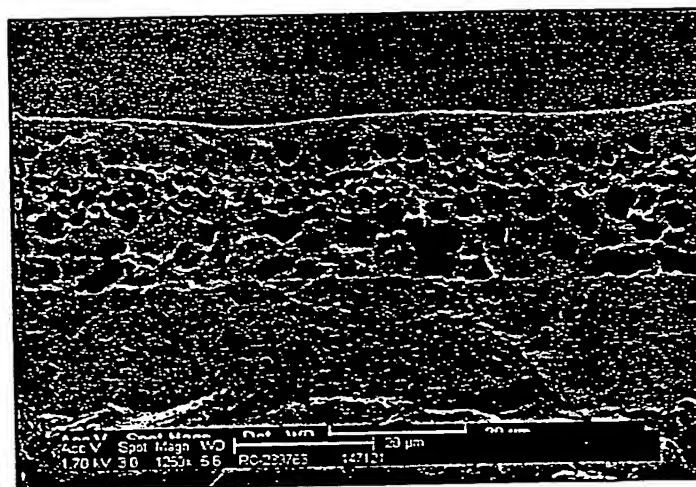


Fig 1: Coating A – blowing agents added to melts prior to coating

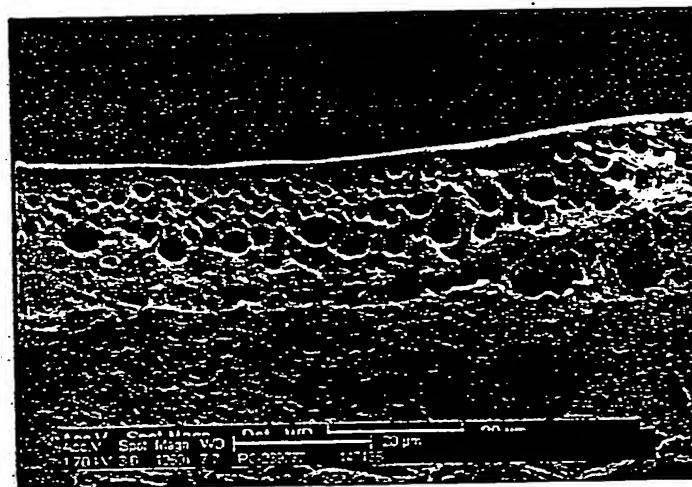


Fig 2: Coating B – blowing agents dual melted into top ink receiving layer

